


## OVERVIEW

CT5130-2 is a Cobalt based alloy, which provides excellent resistance to wear, galling, and corrosion. It is able to retain these same properties at elevated temperatures. CT5130 also has good resistance to impact and cavitation erosion. This material is applied using the HVOF process to achieve a very dense and hard coating. CT5130-2 may be used in oxidizing or reducing atmospheres and in non-oxidizing environments.

## TYPICAL PROPERTIES

<b>Nominal Composition Cobalt:</b>	Bal Co – 28% Cr – 4.5% W – 1.1% C 1.1% Si
<b>Bond Strength:</b>	9,500 psi
<b>Coating Porosity:</b>	Less than 1%
<b>Coating Hardness:</b>	DPH300 500 Min
<b>As-sprayed Surface Roughness:</b>	200-250 RMS

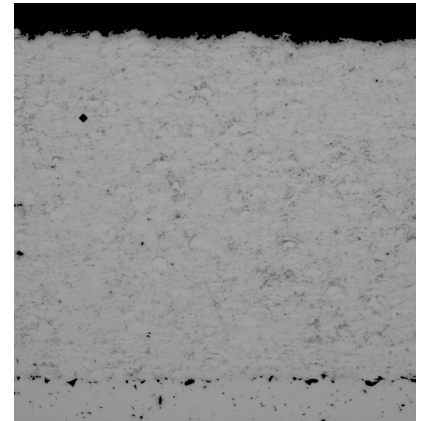

## FOR THE FOLLOWING APPLICATIONS

CT5130-2 is widely used in gas turbine and industrial applications where a combination of high temperature resistance and wear resistance are desired. It is an excellent material for use in one side wearing against most metals used in hot oxidation or hot corrosion applications. It is also frequently used in elevated temperature applications where superior wear resistance is required.

## FINISHING

CT5130-2 may be finished by wet grinding with silicon carbide wheels. The coating may also be lapped or superfinished.